



367.41081X00

Applicant(s): HUTCHINSON, et al
Serial No.: 10 /043,109
Filed: JANUARY 14, 2002
Title: PORTABLE TELEPHONE

LETTER CLAIMING RIGHT OF PRIORITY

Assistant Commissioner for
Patents
Washington, D.C. 20231

FEBRUARY 8, 2002

Sir:


Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s)
the right of priority based on:

Great Britain Patent Application No. 0101572.6
Filed: JANUARY 22, 2001

A certified copy of said Great Britain Patent Application is attached.

Respectfully submitted,


ANTONELLI, TERRY, STOUT & KRAUS, LLP



Donald E. Stout
Registration No. 26,422

DES/rp
Attachment

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 16 January 2002

THIS PAGE BLANK (USPTO)

22 JAN 2001

The
Patent
Office

23JAN01 E599893-1 002718
P01/7700 0.00-0101572.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PAT 01001 GB

2. Patent application number

(The Patent Office will fill in this part)

0101572.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

5911995004

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

PORTABLE TELEPHONE

5. Name of your agent (if you have one)

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU140NG UK

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

7577638001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) 2

Abstract 1

Drawing(s) 4

10. If you are also filing any of the following, state how many against each item.

Priority documents


Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.
- | | | |
|----------------|--|----------|
| Signature |  | Date |
| JULIET HIBBERT | | 21.12.00 |
12. Name and daytime telephone number of person to contact in the United Kingdom
- | | |
|------------|--------------|
| EAN DAVIES | 01252 865390 |
|------------|--------------|

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PORTABLE TELEPHONE

PAT 01001 GB

This invention relates to a two-part mobile telephone configured to be worn about the person, particularly in the manner of a wristwatch.

5

Portable telephones have become ever smaller and lighter since portable telephones first became widely available for use by the general public. Current portable telephones are very compact and lightweight, and manufacturers are keen to develop telephones which are considered personal accessories, to be carried or worn about the person, rather than separate articles which can be more easily misplaced.

10

Part of the inspiration for the present invention came from the realisation that people are generally accustomed to wearing a watch, and do not generally object to wearing one all day, every day. Indeed, many watches, particularly of the diving or chronograph type, can weigh considerably more than many of the more recent portable telephones. For instance, the Nokia® 8890 telephone weighs 91g and has a volume of 70cc, whereas a typical sports or diving watch can weigh well over 100g. The weight of such watches is often regarded as a sign of quality.

15

20

The majority of the weight of such sports watches may be made up of the metalwork of the strap and casing. If the weight of such watches can be capitalised upon, and used instead for functioning circuitry, a telephone can be constructed which the user can wear around his wrist, in the manner of a watch, without noticing any appreciable difference in weight compared with a regular watch.

25

A wrist-mounted portable telephone is disclosed in co-assigned patent GB2317300B. In this case, a telephone element 5 is arranged to be detached

30

from a wrist band 2, allowing the user to use the detachable element in the same manner as a regular telephone.

5 A problem with such an apparatus is the limited volume available in the telephone element 5 itself. The only space available for the battery is in the main body 7 of the telephone 5. Such limited volume restricts the capacity of the battery, which is generally the single bulkiest component of a portable telephone. A limited battery capacity in turn impacts upon the time for which the telephone may be used between charging cycles, causing inconvenience
10 to the user by the frequency of re-charges which are necessary to maintain the telephone in functioning order.

For a better understanding of the present invention, and to understand how the same may be brought into effect, the invention will now be described, by
15 way of example only, with reference to the appended drawings in which:
According to the present invention, there is provided a portable telephone assembly comprising first and second portions wherein the first portion: comprises a primary power source; is independently operable as a portable telephone; and is arranged to be detachably connectable to the second
20 portion, and the second portion: is arranged to be removably attachable to a user; and comprises an auxiliary power source operable to supplement the primary power source when the first and second portions are connected.

Figure 1 shows a prior art wrist-mounted telephone;
25

Figure 2 shows an exploded view of a telephone apparatus according to an embodiment of the present invention;

Figure 3 shows a charger for use with the telephone apparatus of Figure 2;
30 and

Figure 4 shows a schematic illustration of the power connections associated with embodiments of the invention.

Figure 2 shows an exploded view of a wrist-mounted telephone apparatus 100 according to an embodiment of the invention. The telephone apparatus 100 comprises two parts: a detachable telephone part 200, and a strap or bracelet-like part 300 for attachment to a user's wrist.

The telephone part 200 is shown separate from the strap part 300 for clarity. In reality, in the configuration shown, it would be located flush against the strap 300. The telephone part 200 comprises all the circuitry and elements normally associated with a portable radio telephone, as would be known by the skilled man. The telephone part comprises three major portions: an upper portion 210, a central portion 240 and a lower portion 270.

A microphone element is positioned in the lower portion 270. A battery (not shown in Figure 2) is positioned in the lower portion also. An earpiece and antenna are positioned in the upper portion 210. The central portion 240 accommodates the bulk of the circuitry of the telephone, including a display 250, and a number of user-operable input keys 260. The keys are for controlling the operation of the telephone, and may be disposed on the front surface, as well as along one or more edges of the telephone 200.

When not in use, the telephone part 200 attaches firmly to the strap part 300. In order to use the telephone, the user operates the release mechanism to free the telephone from the strap. The release mechanism can take many forms, and its exact operation is not critical to the operation of the invention.

For instance, a release mechanism similar to that described in the aforementioned prior art document GB2317300B could be used. The mechanism therein described comprises two user-operable release latches which are situated on opposing edges of the telephone. The latches are

arranged to engage with complementary parts on the bracelet and so lock the telephone to the bracelet. To remove the telephone part, the user simply squeezes the two latches, which unlocks the telephone and allows it to be removed from the bracelet. To re-attach the telephone, the user simply snaps
5 the telephone back into position, and so re-engages the latches.

Alternative arrangements are possible, and will depend on the exact design chosen for the apparatus. For instance, some form of press-stud or snap-fit arrangement can be used.

10

Due to the telephone part 200 being limited in size, by virtue of having to be accommodated on a wrist strap, it is difficult to provide a battery of sufficient capacity to provide a level of operational and standby time which will be comparable with that offered by regular telephones. Users now expect their
15 telephones to offer standby times of several days.

In the apparatus 100 disclosed here, the independently operable telephone part 200 contains a primary battery 280, positioned in the lower portion 270. This operates to provide the power for all the functions of the telephone part,
20 but due to its necessarily small size, and hence relatively low power capacity, it can prove difficult to provide an operational or standby time which will meet the user's expectations.

To address this problem, the strap part 300, which remains attached to the
25 user's wrist, is provided with a secondary power source (see Figure 4), which is operable to supplement the power of the primary source. The power in the telephone's primary battery is supplemented by using the secondary power source to recharge the battery 280 in the telephone.

30 The secondary, or auxiliary, power source comprises a number of battery cells 315 which are electrically connected together and disposed in the enlarged

portions 310 of the strap 300. The cells are connected together in the required number to make up a battery of the required capacity and voltage.

Any type of rechargeable battery cell is suitable for use in this application.

- 5 Typical types of battery technology include Lithium-ion (Li-ion) and Nickel Metal Hydride (NiMH).

When the telephone part 200 is attached to the strap part 300, electrical connection between the primary and auxiliary power sources is effected via
10 two contacts on the telephone part and mating contacts on the strap part. Of course, these need not use direct electrical connection and may be implemented in any way that allows a charging connection to be established. For instance, refer to the following description of contactless charging by inductive means.

- 15 Associated with the primary power source is a charging circuit which charges the primary power source using power derived from the auxiliary power source. The charging circuit may be disposed in either the telephone part 200 or the strap part 300.

20 Through use of the charging connections, or other detection means, it is possible for the charging circuitry to establish when the telephone part 200 is attached to the bracelet 300. If attachment is detected, the voltage or other status of the primary power source 280 is measured and, if below a defined
25 threshold, charging is initiated.

Through use of such an auxiliary power source, the primary power source 280 in the telephone part 200 may be kept to an acceptable size, whilst still being easily re-chargeable from a conveniently located source, i.e. the strap 300,
30 which forms part of the usual means of carrying the telephone part.

Of course, it will be necessary to charge the secondary power source periodically also. To that end, a bedside charger apparatus 400 is disclosed in Figure 3.

- 5 Charger 400 connects to the normal domestic mains AC power supply (110V to 240V depending on location). It is primarily designed to be located at the user's bedside so that when the wrist mounted assembly 100 is removed at night, it can be inserted into slot 410 of charger 400 to re-charge the secondary power source overnight.

10

Connection between the secondary power source and the charger 400 can be effected through the direct electrical connection, as is normal in currently available telephone charger arrangements. For instance, two conductive contacts could be disposed on a region of the bracelet 300. These contacts
15 would connect internally with the secondary power source 315. Two sprung complementary contacts would then be provided in the slot 410 of the charger so that when the telephone 100 is inserted, the charging circuit is completed and the secondary power source can be charged.

- 20 However, it may not always be desirable to provide a direct electrical connection between the secondary power source and the charger. An alternative and preferred charging technique relies on an inductive coupling between the charger and the secondary power source.

- 25 This configuration is shown in Figure 4. Charger 400 is connected to the mains AC supply 500. Charger 400 is equipped with a primary coil 450 of a transformer which is used to couple energy from the mains supply 500 to the secondary DC power source 315 via secondary coil 350.

- 30 When the telephone 100 is inserted into the charger 400, the two halves of the transformer 350, 450 are disposed adjacent one another, and so energy is
-

inductively coupled from the primary coil 450 to the secondary coil 350, and so to the charging circuit forming part of the secondary power source 315.

5 The secondary coil 350 can be disposed as a planar coil located just beneath the outer surface of one of the enlarged portions 310 of the bracelet part 300. The primary coil can then be located at the rear of the slot 410 of the charger so that when the telephone 100 is inserted, the two coils lie adjacent one another, thus ensuring maximum transfer of energy.

10 Figure 4 also shows the power connections between the secondary source 315 and the primary source 280. These are shown as direct electrical connections, although these too could be implemented as an inductive coupling as previously described

15 In the light of the foregoing description, it will be clear to the skilled man that various modifications may be made within the scope of the invention.

The present invention includes any novel feature or combination of features disclosed herein either explicitly or any generalisation thereof irrespective of
20 whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

CLAIMS

1. A portable telephone assembly comprising first and second portions wherein the first portion:

- 5 comprises a primary power source;
is independently operable as a portable telephone; and
is arranged to be detachably connectable to the second portion,

and the second portion:

- 10 is arranged to be removably attachable to a user; and
comprises an auxiliary power source operable to supplement the primary
power source when the first and second portions are connected.

2. A portable telephone assembly as claimed in claim 1 wherein the
15 auxiliary power source comprises a battery.

3. A portable telephone assembly as claimed in claim 2 wherein the
battery comprises several re-chargeable cells distributed about the second
portion.

20

4. A portable telephone assembly as claimed in any one of the preceding
claims wherein the second portion is arranged for removable attachment to a
user's wrist.

- 25 5. A portable telephone assembly as claimed in any one of the preceding
claims wherein charging circuitry is provided re-charge the primary power
source from the auxiliary power source.

- 30 6. A portable telephone assembly as claimed in claim 5 wherein the
charging circuitry is disposed in the second portion.

7. A portable telephone assembly as claimed in any one of claims 5 or 6 wherein the charging circuitry comprises contactless inductive charging apparatus.

5 8. A portable telephone apparatus as claimed in any one of the preceding claims further comprising charging apparatus for re-charging the auxiliary power source.

9. A portable telephone apparatus substantially as herein described and
10 with particular reference to Figures 2 to 4 of the accompanying drawings.

ABSTRACT

A portable telephone assembly comprising first and second portions is disclosed. The first portion comprises a primary power source, is independently operable as a portable telephone and is arranged to be detachably connectable to the second portion. The second portion is arranged to be removably attachable to a user and comprises an auxiliary power source operable to supplement the primary power source when the first and second portions are connected.

10 Figure 2

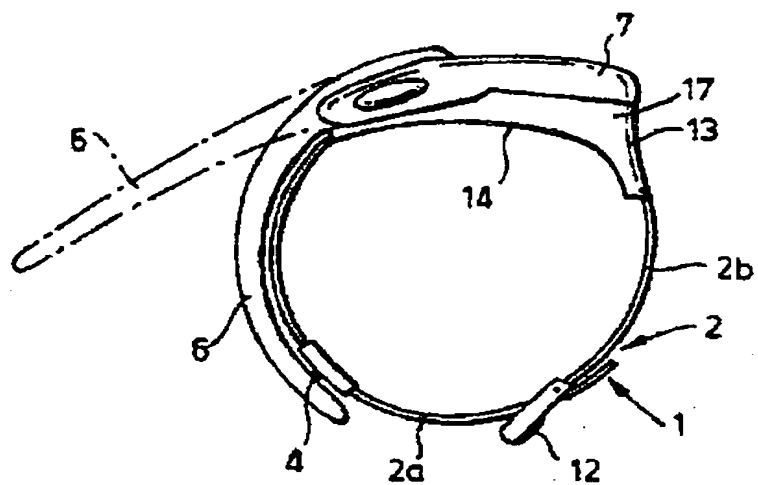
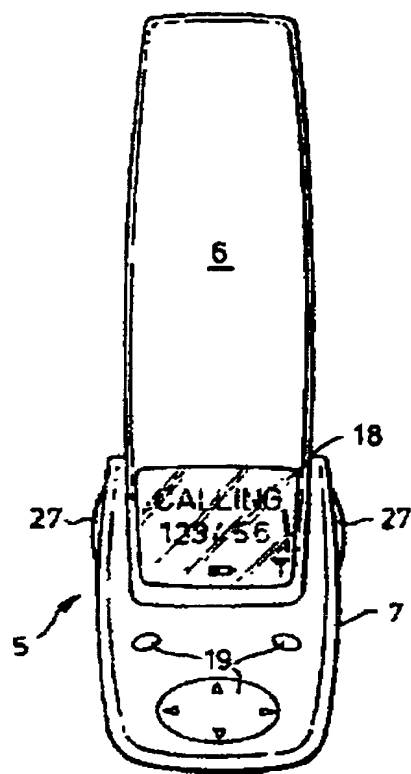
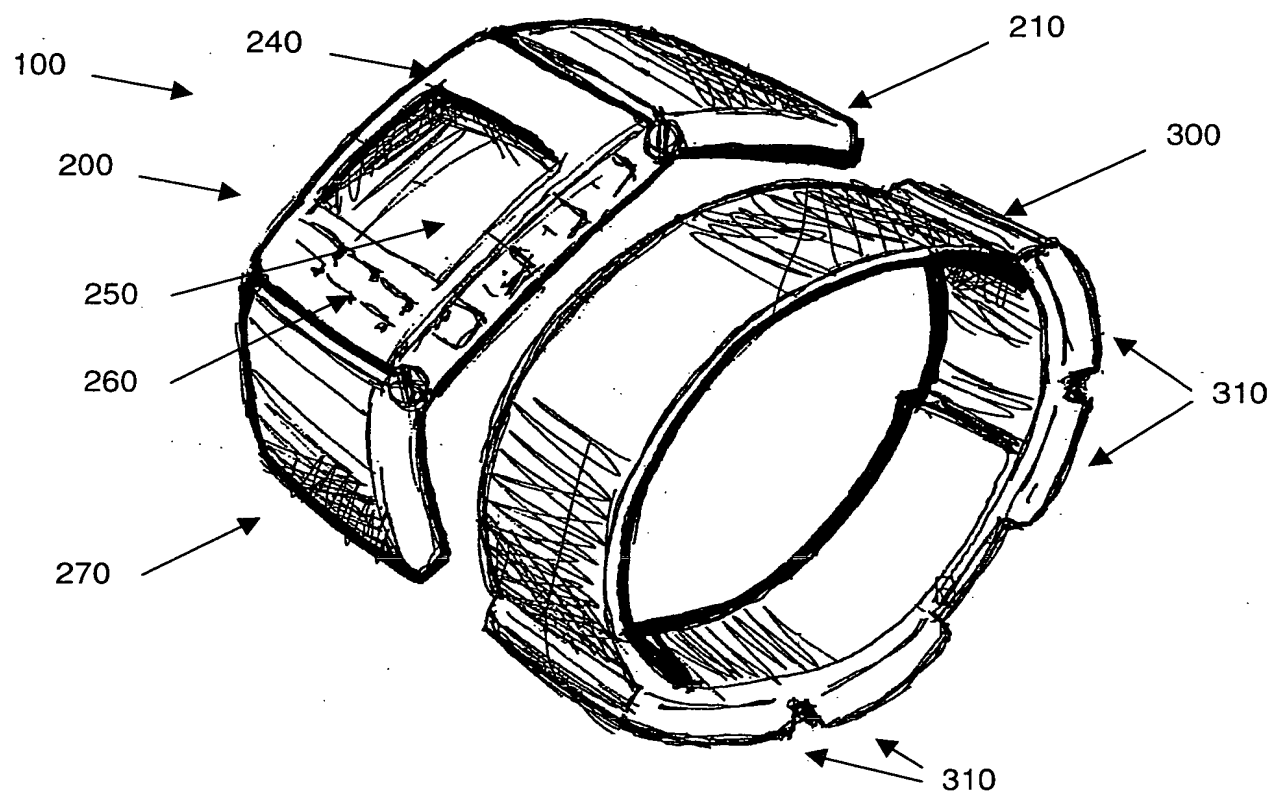


Figure 1
PRIOR ART

THIS PAGE BLANK (USPTO)

**Figure 2**

THIS PAGE BLANK (cont.)

3/4

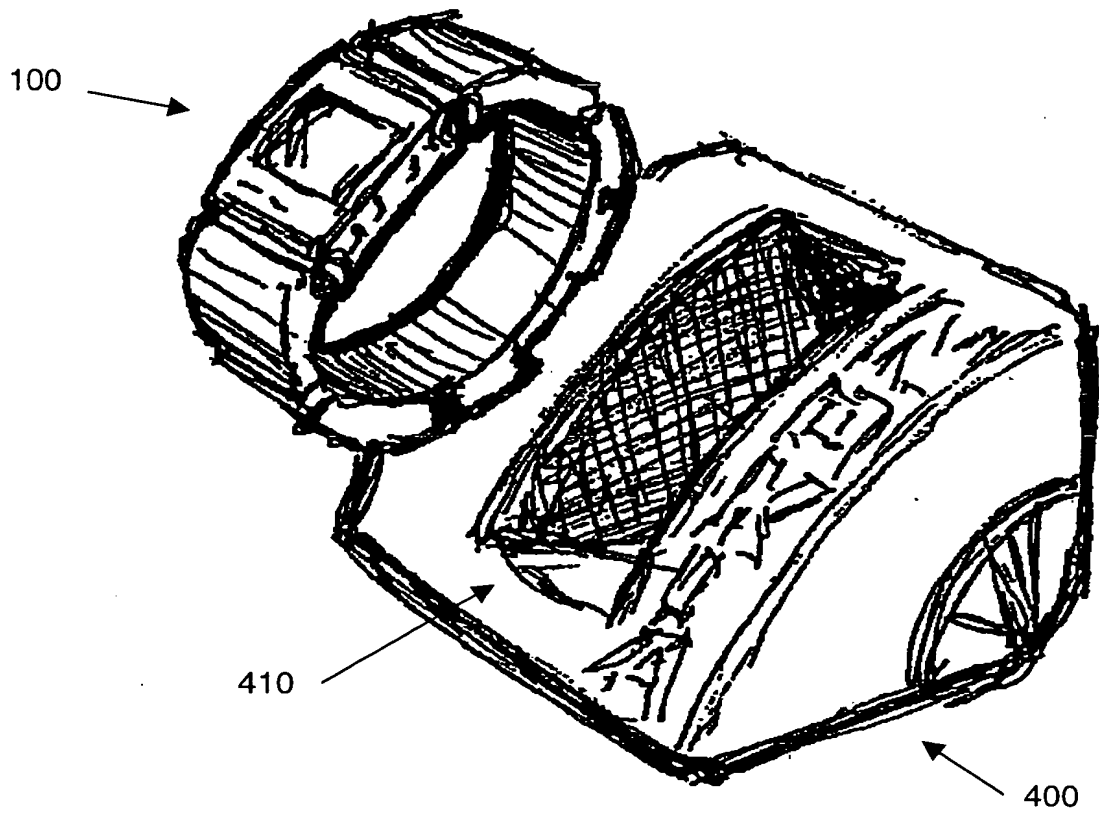


Figure 3

THIS PAGE BLANK (USPTO)

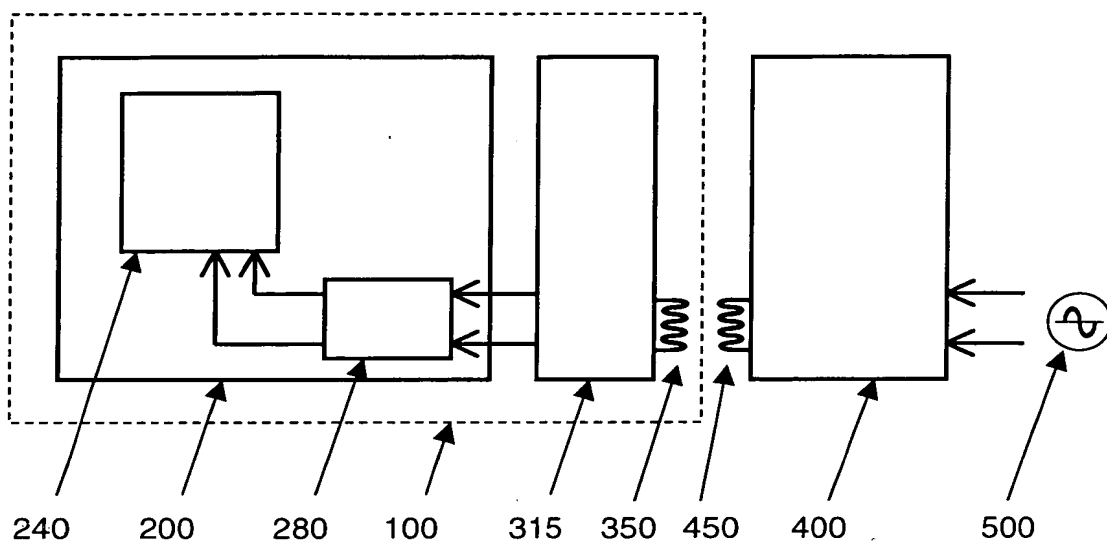


Figure 4

THIS PAGE BLANK (USPTO)